




# SafetyDave


*Fire safety, first aid & rear vision systems*

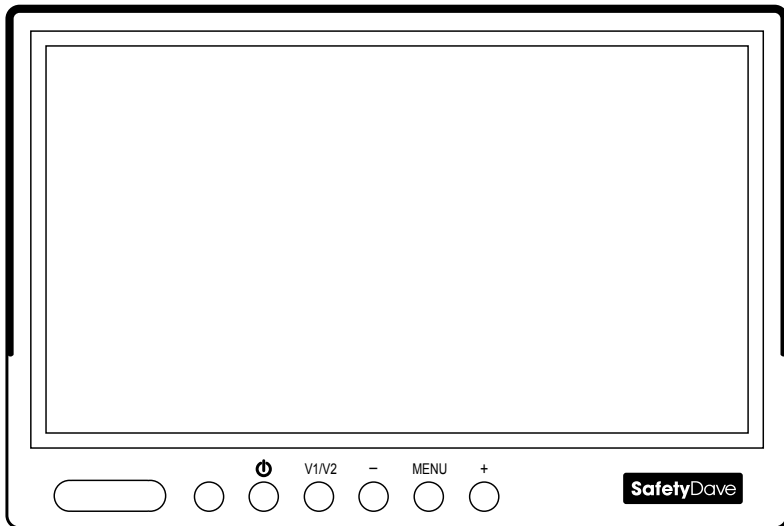

## **User Manual**

### **7" HD Monitor SDAHD7**

## COMPONENTS

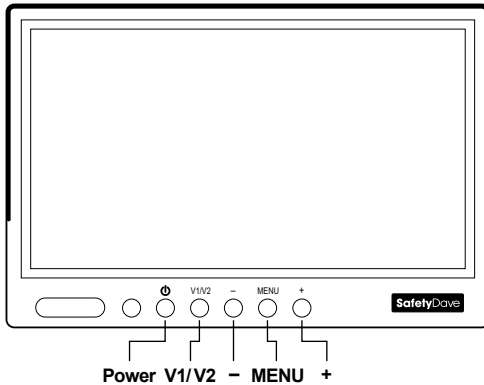

### Operating Monitor

When the monitor is powered on a blue screen is displayed, the wording "no signal" will appear in the centre of the screen. When viewing Channel 1, a (AV1) symbol will appear in the top left-hand corner of the screen and when viewing Channel 2, a (AV2) symbol will appear in the top left-hand side of the screen.

### Menu Functions

Press the menu button each time for the following selections.

Adjustments can be made by pressing the (+) button to increase (–) button to decrease to the desired level.

- Brightness
- Contrast
- Colour
- Tint
- Language - English
- Volume
- Up/Down (Adjust the image upside down)
- Mirror (Adjust the image from left to right)
- Source AV1
- 16.9 (Adjust the size of image on the screen)
- Reset

### Monitor Specifications

Dimensions 172mm(W) x 114.8mm(H) x 20.2mm(D)

Weight 304 Grams

System PAL/NTSC

DC Input 12/24V

Resolution 1024 x 600

Monitor heat rating 70 °C


### Maintenance

If Monitor is **NOT** in use, Keep in safe place away from **HIGH** humidity, sunlight, temperatures conditions.


## INSTALLATION INSTRUCTIONS

### Vehicle Components

7" HD Monitor SDAHD7

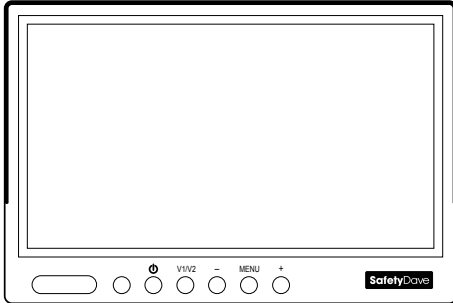


Dash Mount




**Dust Cap**  
(for use on standard 4 pin cable)



Power loom SDHD6

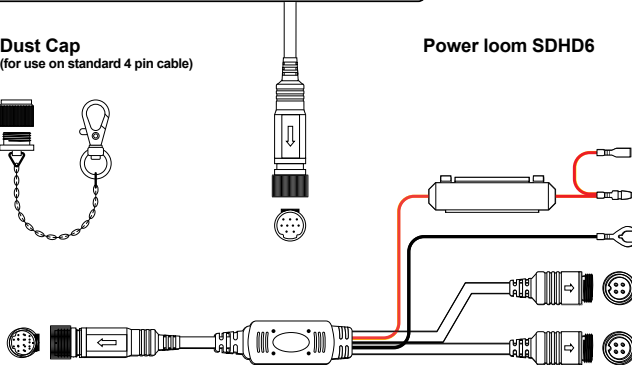


Suction Mount



### Optional Parts


**Woza Single**

For single camera on the caravan

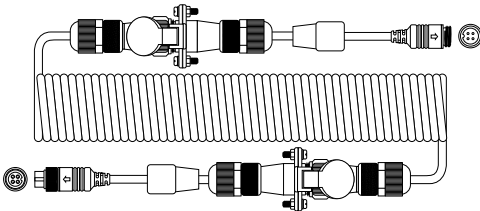


**Woza Double**

For Two cameras on the caravan

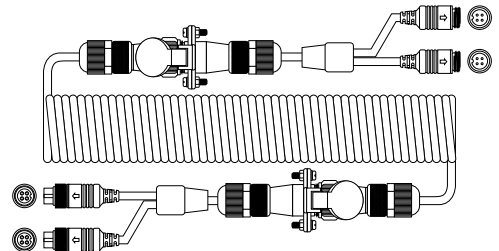

## WIRING INSTRUCTION

### Power Loom

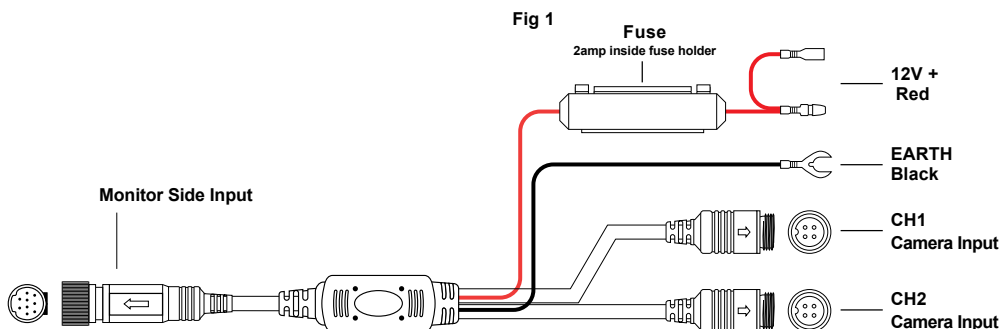

### Single Camera on the Van

Connect the 7.5m to CH1 on the Power Loom

If two cameras on the rear of the caravan you will need to use CH2. (connect additional 7.5m cable to CH2)

Red cable to 12/24V+ to Ignition power from the vehicle.

Black cable to a good ground source.

To avoid incorrect cable installation, start from the front of the vehicle and work towards the rear of vehicle.

**All cables are marked with an arrow on each end for correct connection.**

### Trouble Shooting

#### **Monitor not turning on**

- Check the fuse located on the Power loom (page 4 Fig1) if blown.
- Fuse in contact. Check earth to system

#### **Monitor showing blue screen (No Signal)**

- Ensure all connections are secured & connected arrow to arrow on the ends
- Ensure you are on the correct channel on the Monitor (AV1 or AV2)
- Ensure the Caravan or camera is connected to the system